




SAFETY CABINET IN SINGLE BLOCK STRUCTURE

ART. P3/150

- Safety cabinet in single block structure
- Ex. dimensions cm. H.150 L.50 P.34
- Int. dimensions cm. H.149 L.46,7 P.26
- Weight Kg. 77
- Internal volume Lt. 180
- Structure in mm. 2 thickness, internal side panes in mm. 1 thickness, internal shelves in mm. 50 thickness
- Door in mm. 2 thickness with internal hinges - opening to 180°
- Locking system with rack with 3 expansions which operates 3 horizontal bolts 1 upper and 1 lower \varnothing . 22. mm
- Locking system operated by handle and re-locked by double-bitted lock (certified EN 1300 class "A") and eventual mechanical or electronic combination. Not removable key with open door (2 keys supplied)
- Locks protected by a manganese steel plate
- Anti-tear edge on hinges side
- Prepared for floor (n. 2 holes \varnothing 11 mm) e wall (n. 2 holes 11 mm) fixing
- Handle projection mm 50
- Color grey RAL 7032 in peeled finish

INTERNAL SET-UP: 3 movable shelves

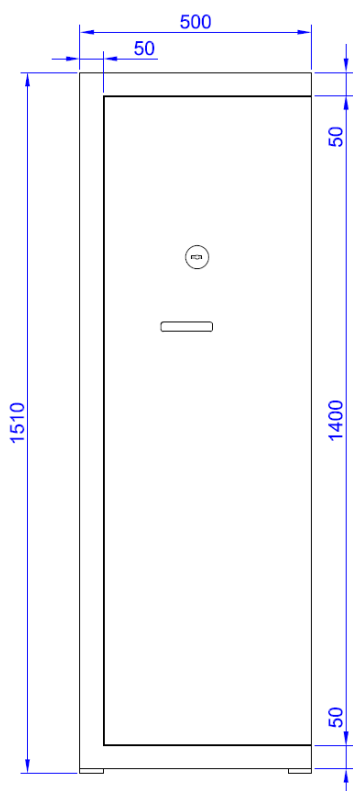

ART. CODE	LOCKING SYSTEM
P3/150	Double-bitted lock
P3/150/3D	Double-bitted lock + mechanical combination
P3/150/E	Double-bitted lock + electronic combination